


# PRODUCT INFORMATION SHEET

## Type TC Toggle Clamp

Designed for service suspension from pre-cast hollow core slabs (minimum core depth 75mm).



**Material:** Steel strip, zinc plated.


Order Code	Rod min 8.8	Hole Ø mm	Safe Working Load (FOS 3:1) Tensile/ 1 Rod kN	Tightening Torque Nm	Dimensions		
					T (mm)	W (mm)	V (mm)
02311	M8	22	2.45	10	68	16.5	13
02312	M10	25	2.45	10	68	17.5	15

Safe Working Loads subject to the strength of the supporting section.

## Installation Instructions

Instructions for hollow core slab:

1. Pre-assemble the clamp on the rod and insert into the hole (ensure it is central to the hollow core).
2. Shake the rod to allow the toggle body to locate horizontally across the hole, then lower the rod so that the nut locates in the toggle body.
3. Wind up the rod to the top of the section so it is as high as possible. Secure the assembly with a nut and washer.

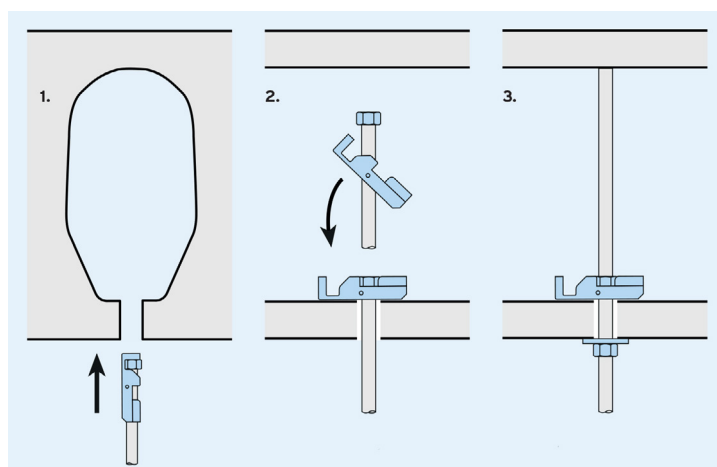

For further product information, please contact one of the Kernow team on 01726 624600 or [sales@kernow-how.com](mailto:sales@kernow-how.com)