


## PRODUCT INFORMATION SHEET

### Girder Flange Clamp

FM and VdS approved flange clamp for use with parallel or tapered flange beams, supplied with the rear hole drilled or tapped.

**Material:** Malleable Iron, Zinc Plated

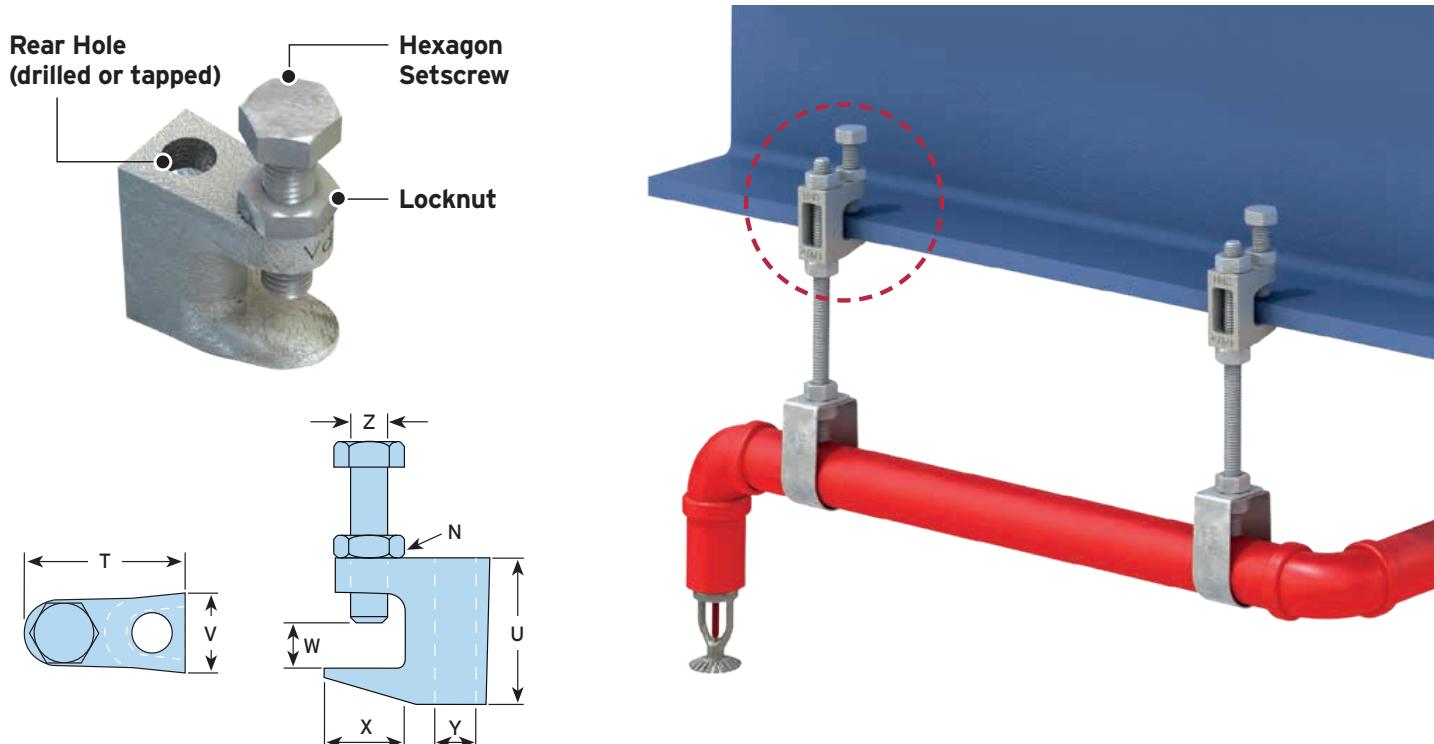

Order Code	Drilled Hole Ø Y mm	Tapped Thread Y	Safe Working Load (FOS 4:1) Tensile kN	Clamping Range W mm	Setscrew Z	Tightening Torque	Tightening Torque	Dimensions			
						Setscrew Z N Nm	Locknut N Nm	T mm	U mm	X mm	Width V mm
04691	11	M10	2.4	3-20	M10	8	22	45	40	22	22

For further product information, please contact one of the Kernow team on 01726 624600 or [sales@kernow-how.com](mailto:sales@kernow-how.com)