

PRODUCT DATA SHEET

Cable Ladder - Straight Lengths

Medium Duty - 100mm

Material:



Mild Steel - BS EN 10149-3 grade S280 - min.
 yeild 280 n/mm² - UTS 370 n/mm²

Finish:

Hot Dipped Galvanised (HDG) to
 BS EN ISO 1461: (To a mean coating
 thickness of 55 µm.)

Rungs:

To alternately face up & down at
 spacings no greater than 300mm.
 Rung quantity may vary.

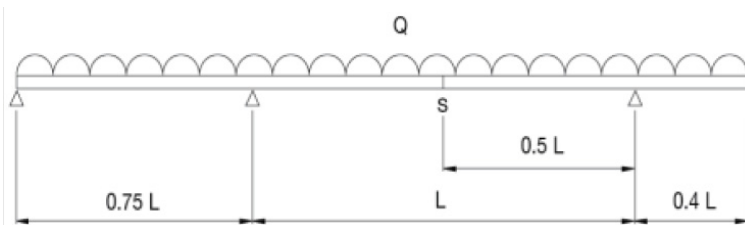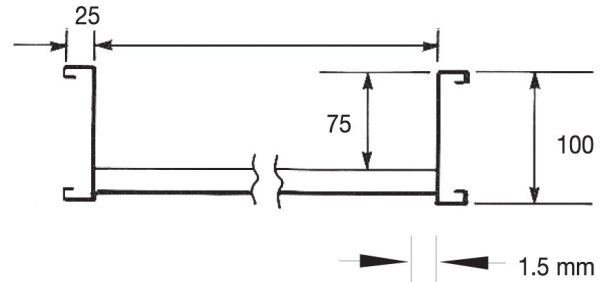


Load test according CEI/IEC 61537:2007

Q = UDL (uniformly distributed load) Safety factor =1.7

L = Intermediate span

F = Deflection = 1/100 of the intermediate span (max.)

S = Splice loaction

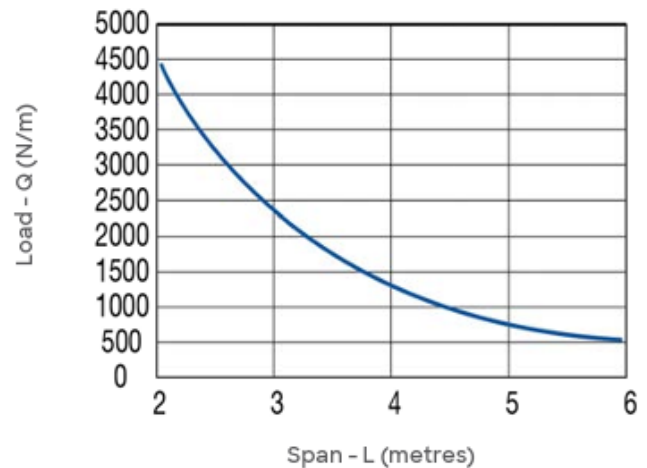

Stock Code	Width (mm)	Length (m)	Useful Cross Section (cm ²)
34000	150	3	113
34001	300	3	225
34002	450	3	338
34003	600	3	450
34004	750	3	563
34005	900	3	650

Stock Code	Width (mm)	Length (m)	Useful Cross Section (cm ²)
34006	150	6	113
34007	300	6	225
34008	450	6	338
34009	600	6	450
34010	750	6	563
34011	900	6	650

For further product information, please contact one of the Kernow team on 01726 624600 or sales@kernow-how.com