

PRODUCT DATA SHEET

Cable Ladder - 90° Flat Bend

Heavy Duty - 125mm

Material:

Mild steel BS EN 10149-3 grade s280 with a min yield of 280N/mm².


Ultimate tensile strength of 370N/mm².

Finish:



Hot Dipped Galvanised (HDG) to BS EN ISO 1461: (To a mean minimum coating thickness of 55 µm.)

Rungs:

To alternately face up & down at spacings no greater than 300mm.
 Rung quantity may vary.

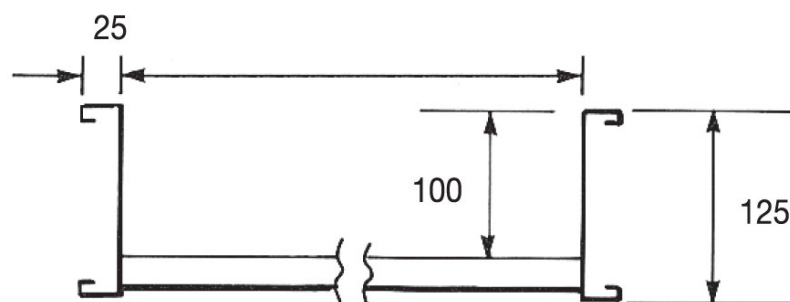Gauge: 2.0mm


Stock Code	Width (mm)	R1 (mm)	R2 (mm)	Z1	Weight (kg)
34220	150	300	450	537	5
34221	300	300	600	537	6.3
34222	450	300	750	537	8
34223	600	300	900	537	9.2
34224	750	300	1050	537	12.8
34225	900	300	1200	537	14.6

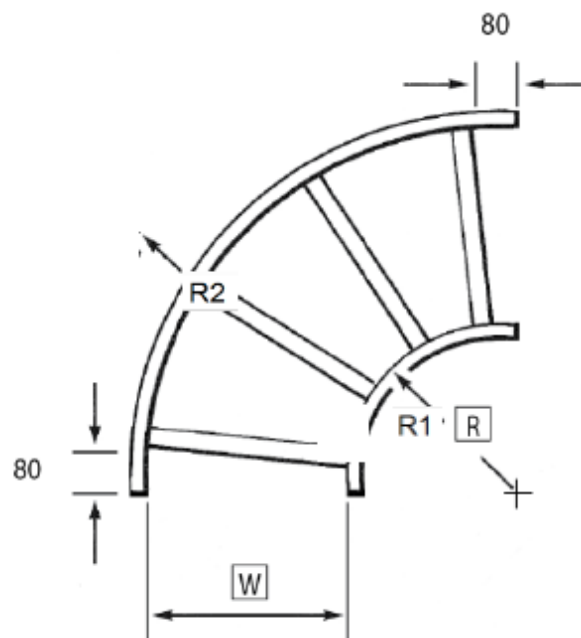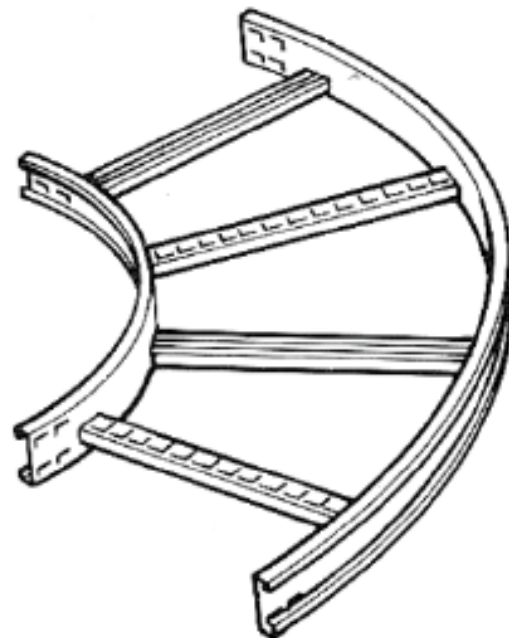

For further product information, please contact one of the Kernow team on 01726 624600 or sales@kernow-how.com