

TECHNICAL DATA SHEET

Cable Ladder - Equal Tee

Heavy Duty - 125mm

Material:

Mild steel BS EN 10149-3 grade s280 with a min yield of 280N/mm².

Ultimate tensile strength of 370N/mm².



Finish:

Hot Dipped Galvanised (HDG) to BS EN ISO 1461: (To a mean minimum coating thickness of 55 µm.)


Rungs:

To alternately face up & down at spacings no greater than 300mm.
 Rung quantity may vary.

Gauge: 2.0mm

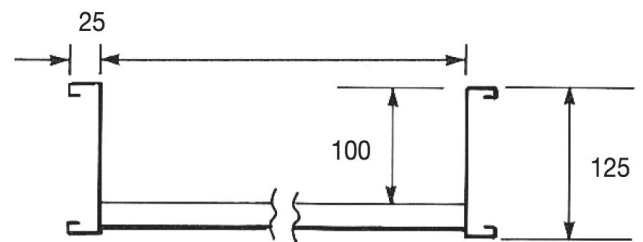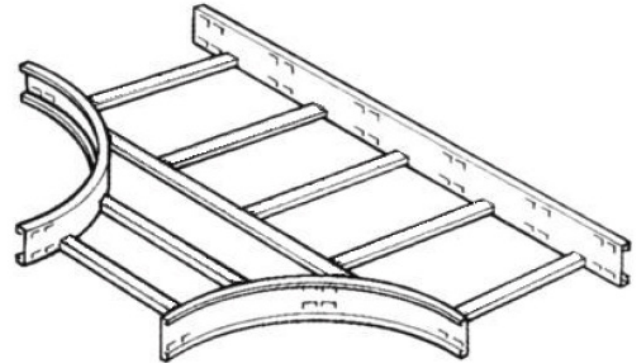

Stock Code	Width (mm)	R (mm)	X (mm)	Weight (kg)
34250	150	300	455	7.6
34251	300	300	530	9.7
34252	450	300	605	11.3
34253	600	300	680	12.9
34254	750	300	755	17.1
34255	900	300	830	19.2

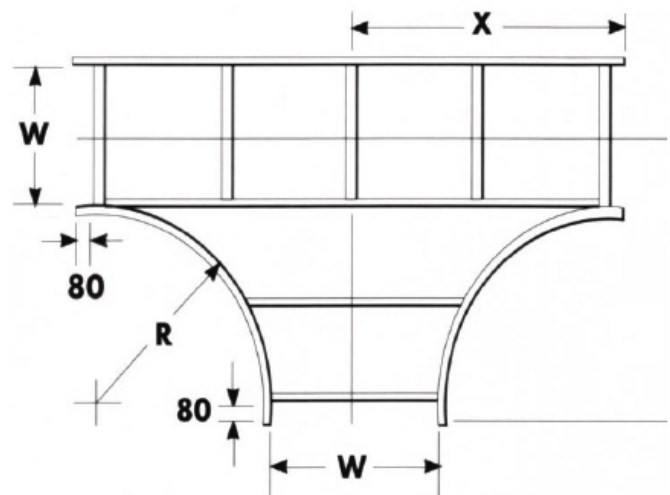

For further product information, please contact one of the Kernow team on 01726 624600 or sales@kernow-how.com